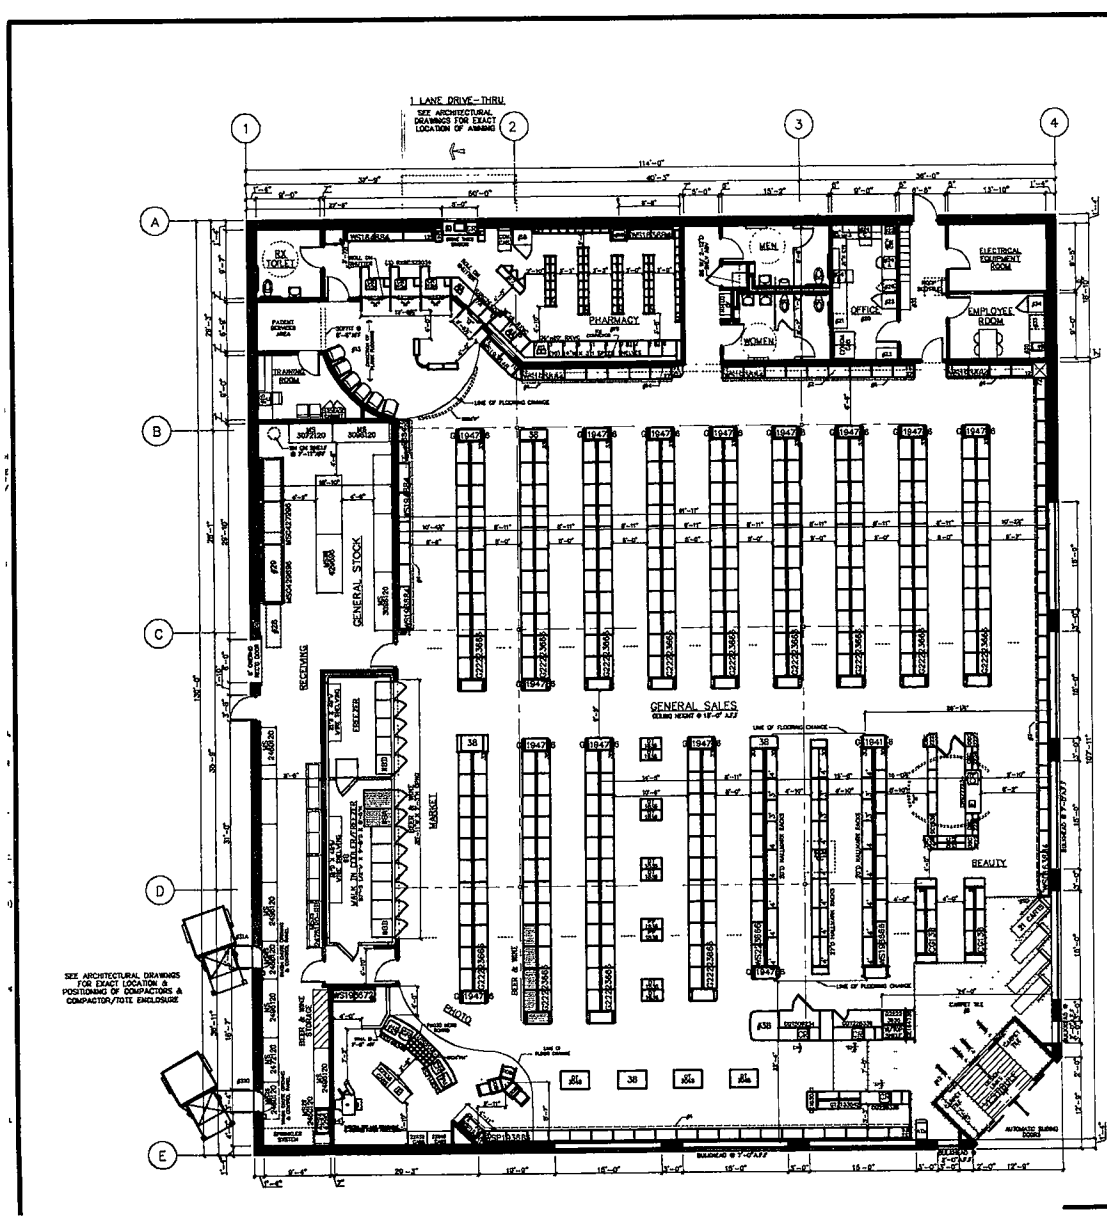



FOR REFERENCE ONLY SEE CONTRACT DOCUMENTS FOR DETAILED SITE PLAN

TOTAL BY LINEAL FOOTAGE	1385 LN. FT.
FRONT WALL SHELVING	63 LN. FT
BEAUTY WALL SHELVING	78 LN. FT
ASIAMAWING WALL SHELVING (BACK & SIDE WALL, RX SEATING)	95 LN. FT
BACK GONDOLAS	504 LN. FT
FRONT GONDOLAS	335 LN. FT
WALLMARK SHELVING	120 LN. FT
BEAUTY GONDOLAS	36 LN. FT
COOLERS	20 LN. FT
FREEZERS	13 LN. FT

RECEIVED
APR 08 2010
IDAHO STATE POLICE
ALCOHOL BEVERAGE CONTROL

INTERIOR HANGING SIGNS

GENERAL SALES AREA
ALL SIGNS @ 10'-0" TO BOTTOM OF SIGN UNLESS OTHERWISE NOTED.
AISLE MARKERS @ 8'-0" TO BOTTOM OF SIGN.

SIGN "B" BEAUTY SIGN (9'-0" TO BOTTOM OF SIGN)
SIGN "L" LIQUOR / THANK YOU
SIGN "PM" PHOTO SIGN (9'-0" TO BOTTOM OF SIGN)
SIGN "T" STORE HOURS SIGN
SIGN "GC" GREETING CARD SIGN
SIGN "D" DOWNTOWN CHECKOUT LANE 8
SIGN "CA" CALIFORNIA ACCESSIBILITY SIGN (9'-0" TO BOTTOM OF SIGN)
SIGN "ADA" SYMBOL OF ACCESSIBILITY

PHARMACY DEPARTMENT
REFER TO FIXTURE PLAN FOR REQUIRED SIGNS
SIGN "J" PICK UP SIGN
SIGN "K" DROP OFF SIGN
SIGN "M" DROP OFF / PICKUP SIGN
SIGN "P" PHARMACY SIGN (9'-0" TO BOTTOM OF SIGN)
SIGN "O" CONSULTATION WINDOW
SIGN "TX" T.A.A.
ATTACH SIGNS TO UNDERSIDE OF CASED OPENINGS.
REFER TO FIXTURE PLAN FOR SIGN LOCATION
PROVIDE (2) HOLLOW WALL ANCHORS PER SIGN.
SCREW THREADED EYEBOLT INTO ANCHOR. HANG SIGNS FROM EYEBOLTS WITH "S" HOOKS.

GENERAL NOTES

GENERAL SALES AREA
1. PLEASE PROVIDE PROPER A.D.A. CLEARANCES ON BOTH SIDES OF ALL DOORS
2. ADHESIVE ON REAR WALL
3. BEAUTY CORNICE
4. SALES AREA CORNICE (FIXTURE MOUNTED)
5. PHOTO CORNICE (FIXTURE MTD UNLESS NOTED)
6. CARPET TILES & DESIGN LINES FURNISHED AND INSTALLED BY WALGREENS (WHEN SHOWN)
7. MASTER-BILT REACH-IN REFRIGERATORS
MODEL TEM ENDLESS REACH-IN REFRIGERATORS AND MODEL TFL ENDLESS REACH-IN FREEZERS (ADD 3" AT EACH END, FOR END PANELS AND ADD FLOOR DRAIN)
A. __ TEM-3-24 74 1/4"W X 34"D X 80"H
B. __ TFL 3-24 74 1/4"W X 37"D X 80"H
SNGSLD SERIES SELF CONTAINED REFRIGERATORS AND FREEZERS
C. __ SNG 74 73"W X 35 3/4"D X 78"H
D. __ SLG 74 73"W X 35 3/4"D X 78"H
SMS SERIES SELF CONTAINED SLIDING DOOR REFRIGERATORS
E. __ SMS-650 70"W X 32 1/4"D X 76 1/2"H
BACK-UP REFRIGERATORS AND FREEZERS
F. __ TAC-48HD: 52"W X 36 3/4"D X 80 1/2"H
G. __ TAF-48HD: 52"W X 36 3/4"D X 80 1/2"H
8. MASTER-BILT WALK-IN COOLER: PROVIDE
8 #1200S COOLMASTER DOORS 30" X 78" EACH AND
6 #1000F FREEZEMASTER DOORS 30" X 78" EACH BY ANTHONY
A. 3 DOOR(S): FOR EACH DOOR PROVIDE (7) __ 72 SIDE OF FLOW GRAVITY SHELVES, UPPER (5) WITH SLIDES AND LOWER (2) WITH ROLLERS COMPLETE WITH UPRIGHTS
B. 6 DOOR(S): FOR EACH DOOR PROVIDE 36"D 8-0-F NYLA-LITE SHELVING SYSTEM
C. __ DOOR(S) __ "D ROLLER CONVEYOR AT FLOOR LEVEL
D. 6 DOOR(S): FOR EACH DOOR PROVIDE 27"D ANTHONY SHELVES
E. __ DOOR(S): FOR EACH DOOR PROVIDE (2) 27"D ANTHONY SHELVES AND (4) 30"D MERCHANDISER SHELVES
F. __ DOOR(S) __ "D DOUBLE DECK ROLLER CONVEYOR
9. ICE CHEST BY VENDOR
10. CANT RAILS W/ DISPLAY SHELF & SLAT WALL ABOVE
11. PROVIDE A 6"H BLACK VINYL BASE AT ALL CHECKOUTS
12. ELECTRONIC ARTICLE SURVEILLANCE SYSTEM

PHARMACY DEPARTMENT
13. PATIENT SEATING AREA, (9) SEATS & TRAFFIC CONTROL FIXTURE
14. PROVIDE FRAMING FOR 3'-0"W X 7'H OPENING FOR FUTURE DROP-OFF WINDOW
15. COMPUTER TERMINAL
15A. INTERCOM PLUS TERMINAL
15C TRAINING TERMINAL (IN TRAINING ROOM)
16. RX SAFE AND CABINET
17. CDX CABINET
18. RX REFRIGERATOR
19. PROVIDE A CARPETED FLOOR WITH RUBBER BUMPERS RX UNDERCOUNTER INSERTS:
#1 RX 3 DRAWER VIAL INSERT
#2 RX 3 DRAWER FILE INSERT
#3 - RX OPEN INSERT
#4 - RX CONSULTATION COUNTER UNIT
#5 - RX PRINTER INSERT
#6 RX 6 DRAWER FILE INSERT
#7 RX OPEN INSERT WITH CPU SHELF(OPN)
#7A - RX OPEN INSERT WITH CPU SHELF (OPN)
#8 RX OPEN CABINET (OPN CNDT)
#9 RX 10 DRAWER FILE CABINET

OFFICE
20. PROVIDE TILED FLOOR & VINYL WALLCOVERING
21. UNDER COUNTER SHELF UNIT
22. PRINTER
23. LATERAL FILE
24. OFFICE COMPUTERS
24A. P.O.S. TERMINAL
24B A5400 TERMINAL
24C OFFICE P.C.
25. T.L.L LOCKER
26. SAFE
27. (NOT USED)

STOCKROOM
28. MEAT-A-PLEX CONVEYOR
29. GRAVITY CONVEYOR
30. POWER ROLLER CONVEYOR
31. SEE ARCHITECTURAL DRAWINGS FOR EXACT LOCATION & POSITIONING OF COMPACTORS
31A. TRASH COMPACTOR
31B BALER
31C CARDBOARD COMPACTOR

EMPLOYEE ROOM
32. EMPLOYEE LOCKERS. (1) 48"W COAT LOCKER W/ PERFORATED DOORS (6) 15"EN BOX LOCKERS & (2) ADA LOCKERS W/ SAFETY VIEW DOORS
33. 6'-0"W X 2'-0" EMPLOYEE COUNTER W/ (1) CABINET
34. EMPLOYEE ROOM REFRIGERATOR (PROVIDE 32" CLEARANCE WHEN NEAT TO COUNTER)
35. EMPLOYEE ROOM SINK (IN COUNTER)
36. (NOT USED)

MISCELLANEOUS
37. "E" - ELECTRICAL OUTLET FOR FUTURE USE
38. DOOR RACKS. REMOVE BASE DECK & SHOES; (END PANEL TO REMAIN)
39. PROVIDE OPENING FOR ONE-WAY GLASS (SEE INTERIOR ELEVATION FOR LOCATION)
40. NEWSPAPER RACK BY VENDOR
41. PICTURE CARE PLUS TERMINAL

Walgreens
FACILITIES PLANNING, DESIGN, & ENGINEERING
108 WILMOT ROAD
DEERFIELD, IL 60015-5105

PROJECT DATA

TYPE		GENERAL SALES	■	MARKET	■
NEW LOCATION	■	PHARMACY	■	SECURITY	☐
NEW LEASEDBLDG	☐	PHOTO	■	24 HOUR STORE	☐
EXISTG BLDG	☐	LIQUOR	☐	OTHER	☐
REMODEL	☐				

SQUARE FOOT AREA SUMMARY

DEPARTMENT		SALES	STOCK	SERVICE	TOTAL EXISTG	TOTAL NEW
GEN SALES	NEW	9247	1832	1333		12,412
	EXISTG					
MARKET	NEW	900				900
	EXISTG					
RX	NEW	725				725
	EXISTG					
RX WAITG	NEW	345				345
	EXISTG					
PHOTO	NEW	436				436
	EXISTG					
LIQUOR	NEW					
	EXISTG					
BSMT	NEW					
	EXISTG					
2ND FLOOR	NEW					
	EXISTG					
TOTAL NEW		11,655	1832	1333		14,820
TOTAL EXISTG						

TOTAL AREA: FIRST FLOOR 14,820 SQ.FT
TOTAL AREA: OTHER LEVELS 0 SQ.FT
GROSS AREA INCLUDING ALL DEPARTMENTS & ALL LEVELS: 14,820 SQ.FT
RX SHELVING LINEAL FEET 20 LN.FT

NO.	DATE	BY	DESCRIPTION	CONST

REVISIONS

CERTIFICATION AND SEAL

I HEREBY CERTIFY THAT THIS PLAN AND SPECIFICATION WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION AND THAT I AM A DULY REGISTERED ARCHITECT OR ENGINEER UNDER THE LAWS OF THE STATE OF IDAHO AS SIGNIFIED BY MY HAND AND SEAL.

STORE NUMBER 11023
PROJECT NAME
WALGREENS STORE
(NWC) OF FIVE MILE & LAKE HAZEL
BOISE, IDAHO